




# Architectural Products

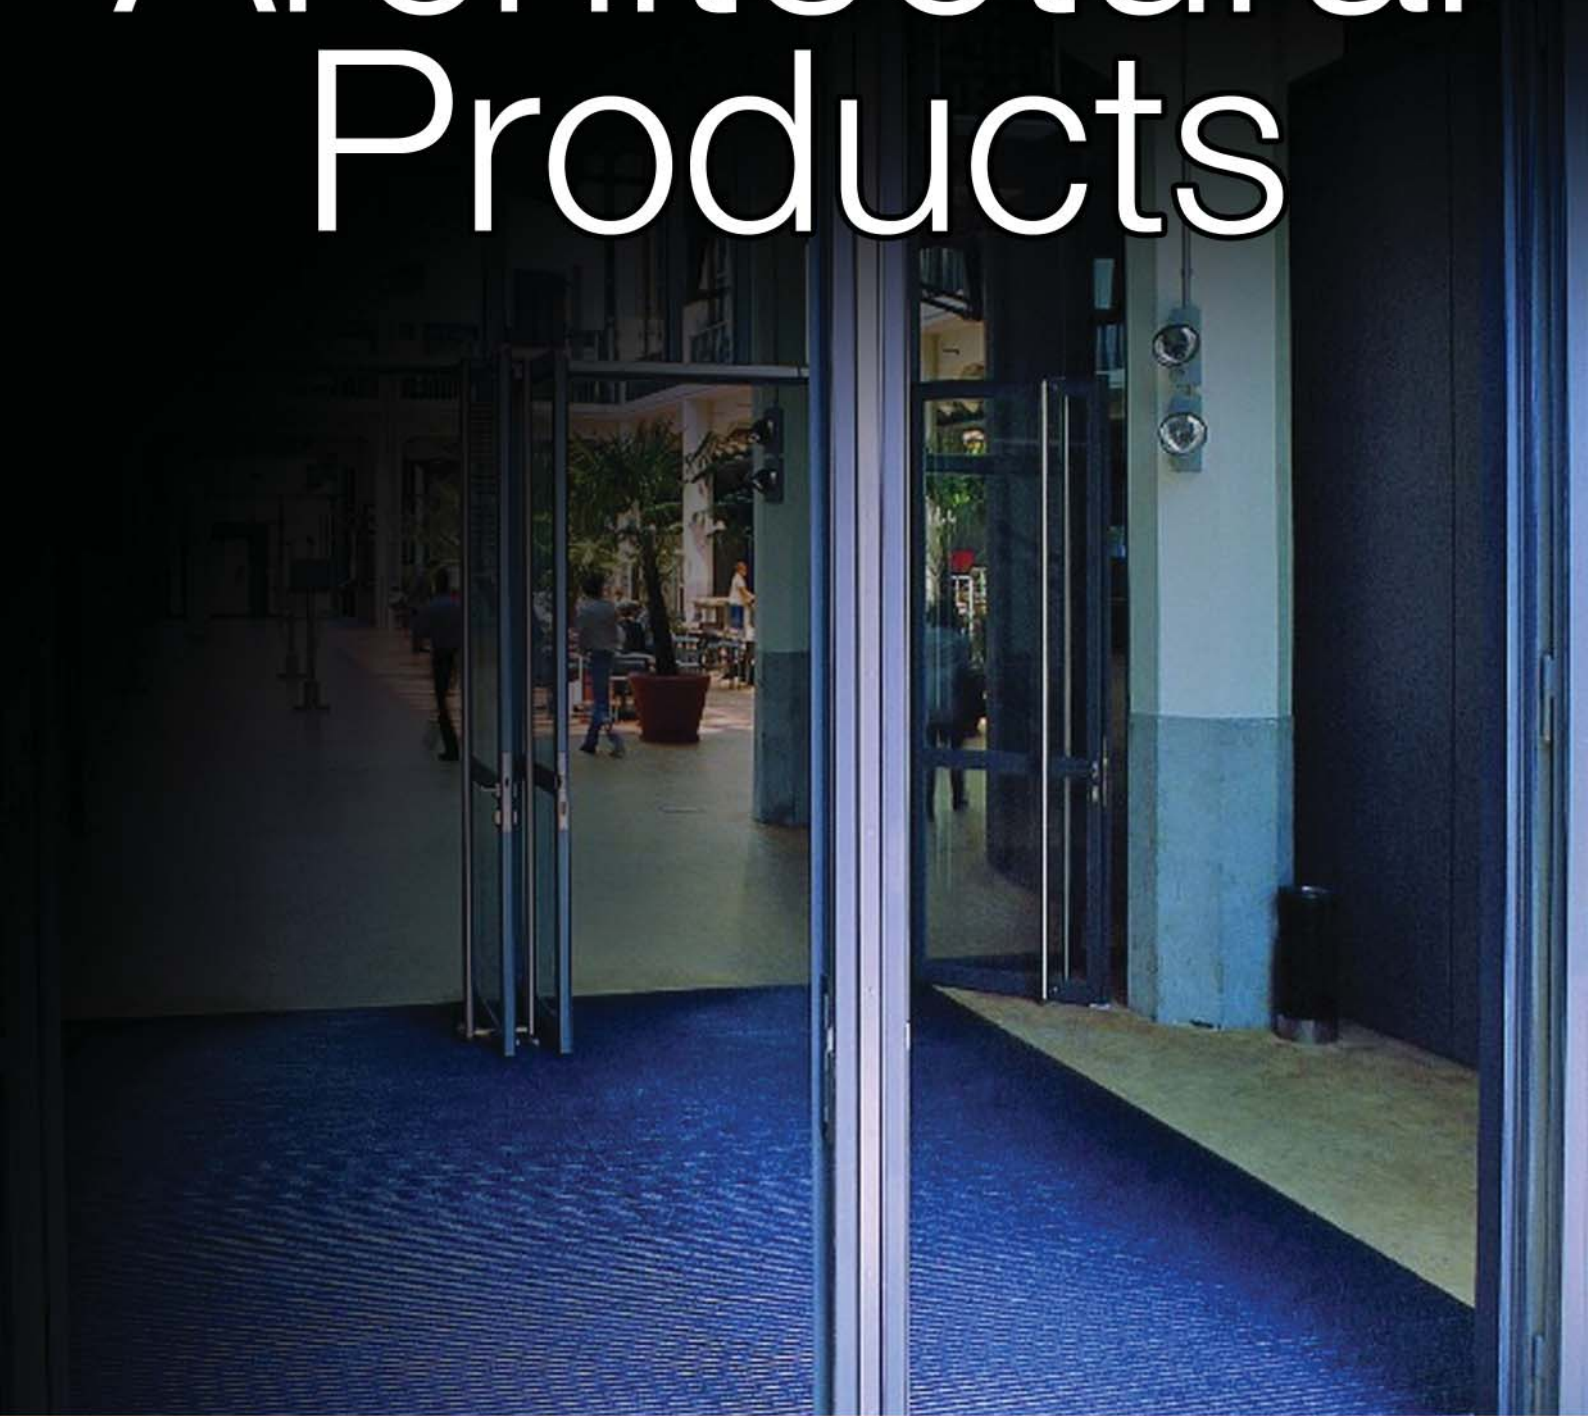

# Architectural Entry Matting

## Top Clean BASIC



*The Top Clean BASIC range is the economical way to enter the class of premier entrance matting. All the combinations of the TREND series are available for the Top Clean BASIC. Bonded PE-foam on the underside ensures optimum noise reduction and provides maximum bearing surface. Available in 10/13, 17 and 22mm. BASIC is made to measure, removable and easy to clean.*

### Colours

Anthracite



Mottled Beige



Mottled Blue



Light Grey



## Style Options

Ribbed Carpet



Cassette Brush



Grooved Rubber




*Recommended for fully covered entrance areas in commercial or residential use where excellent absorption of moisture and removal of dirt is of prime importance.*

### Colours

Anthracite



Mottled Beige



Mottled Blue



Light Grey



### Special Colours

Mottled Green



Blue



Brown



Red



Sand



## Specifications

**Aluprofile** - Warp resistant aluminium profile (wall thickness up to 1,2 mm) for laying directly into existing or new matwells (maximum distance between supports 300 mm).

**Upper** - Ribbed carpet: UV resistant heavy-duty polypropylene, slip resistant qualities R 11 conforming to DIN 51130, special scraper bars made of warp resistant aluminium profile, cassette brush and brush strips made of robust, heavy-duty Nylon 6, anti-slip grooved rubber (EPDM). Grooved across and length ways, heavy-duty and UV resistant conforming to DIN 7863.

**Underneath** - Base of the mat is mechanically fitted with bonded PE-foam for noise reduction (not brush strip or scraper bar).

**Connection** - Stainless steel wire rope for 10/13 and 17 mm in height, PVC coated galvanized wire rope for 22 and 27 mm in height.

**Lock** - Special threaded nipple with stainless steel screw (rust-free).

**Colours Ribbed Carpet** - Anthracite, Light-Grey, Mottled Beige, Mottled Blue; Special colours on inquiry.

**Colours Brush Strip** - Black, Grey, Blue.

**Colours Cassette Brush** - Black, Grey.

**Colour Grooved Rubber** - Black.

**Profile Spacing** - Top Clean BASIC® 10/13 mm: 4 mm; Top Clean BASIC® 17, 22, 4 and 8 mm (spacers made of rubber), profile distance also available in 3 mm for automatic door systems according to DIN 18650.

**Dimensions** - Available in any given dimensions for length of aluprofiles (left to right) and walking direction (front to back) without compensation profile. For an extra charge: Gaps/curves and diagonals can be manufactured according to drawing or template.

**Colours Aluprofile** - Profile can be supplied powder coated to any RAL colour (for an extra charge).

# 3-Zone Cleaning for Commercial Entrances

## Reduce cleaning expenses by up to 90%

First impressions are extremely important. The entrance area of a building needs to convey a stunning impression of cleanliness and co-ordination. SWM Architectural **3-ZONE CLEANING SYSTEM** ensures that entrance lobbies are clean reception areas. The system literally captures dirt before it can enter the building.


**ZONE 1** works to remove coarse dirt

**ZONE 2** brushes off fine dirt

**ZONE 3** absorbs moisture and residual dirt

The system can be custom-designed for site conditions.

SWM Architectural **3-ZONE CLEANING SYSTEM** significantly reduces the amount of cleaning required in nearby floor coverings, and increases their lifespan.

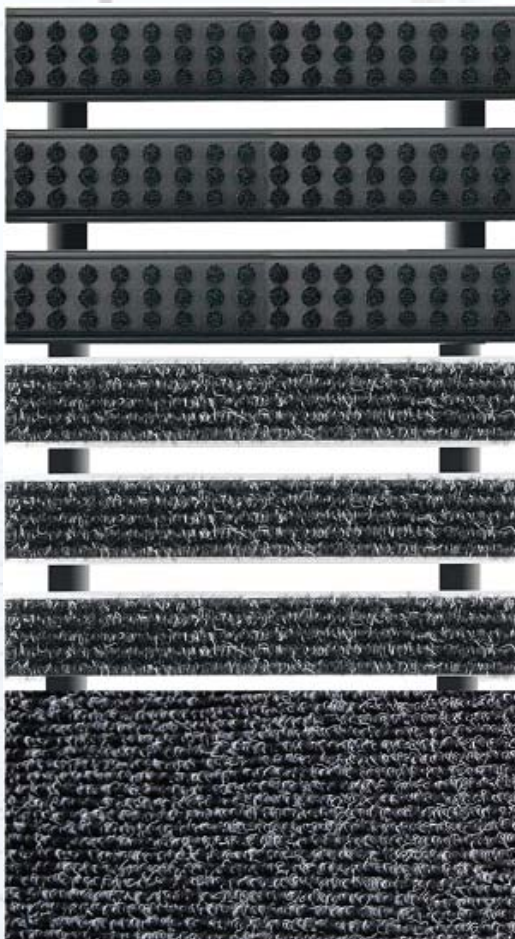

### ZONE 1

Coarse dirt is brushed off in zone 1. Thanks to the rubber or cassette-brush inserts. Suitable for use indoors or out. With certified non-slip properties.



### ZONE 2

Coarse fibre ribbed carpet inserts for brushing off fine dirt. The non-slip insert material is suitable for indoor use and for use in covered outdoor areas.




### ZONE 3

Inside buildings, the non-slip SWM clean-off floor coverings are extremely effective at absorbing moisture and residual dirt, thereby preventing footprints.



# Stair Nosing

## Anodised Aluminium Stairnosing with Carborundum Insert

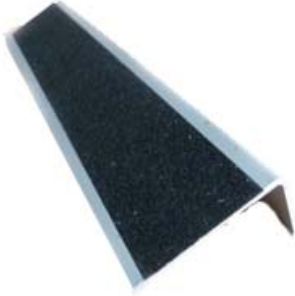

**Details:**

**Code:** ASC7030

**Size:** 70 x 30mm

**Infill:** Black / Yellow Carborundum

## Anodised Aluminium Stairnosing with Carborundum Insert Strip



**Details**

**Code:** ASCS7530

**Size:** 75 x 30mm

**Infill:** Black Carborundum

## Anodised Aluminium Stairnosing with Rubber Insert



**Details**

**Code:** ASR7030

**Size:** 70 x 30mm

**Infill:** PVC Rubber insert

**Available in:** Yellow, Black, Red

## Fibreglass Stairnosing Industrial Grade



**Details**

**Code:** SIY7020

**Size:** 70 x 20mm

**Colour:** Safety Yellow

# Tactile Indicators



## Polyurethane

Code: TSDP

Size: 35 x 25 x 4.5mm

Also available in other colours

- Please enquire



## Stainless Steel

Available in 304 or 316 grade

Code: TSDSS

Size: 35 x 25 x 4.5mm

12mm shank



## Stainless Steel

Code: TSDSSB

Size: 35 x 25 x 4.5mm

no shank



## Stainless Steel

Code: TSDSSP

Size: 35 x 25 x 4.5mm

12mm shank



## Carborundum

Code: TSDSSC

Size: 35 x 25 x 4.5mm

With Carborundum insert



## Copper/Brass

Code: TSDCC

Size: 35 x 25 x 4.5mm

With Carborundum insert



## Copper/Brass

Code: TSDC

Size: 35 x 25 x 4.5mm

## Tactile Sheets



## PVC Tactile Sheet Yellow

Code: TSP3030Y

Size: 300 x 300mm



## Stainless Steel board

With Carborundum insert

Code: TSSSC3030

Size: 300 x 300mm



## Stainless Steel board

Code: TSSSC3030

Size: 300 x 300mm



## Stainless Ribbed Steel board

Code: TSSSR3030

Size: 300 x 300mm

## Tactile Strips



## Polyurethane Tactile Strips

Code: TSP2935

Size: 290 x 35 x 5mm



## Stainless Steel Tactile Strips

Code: TSSST2935

Size: 290 x 35 x 5mm



## Stainless Steel Tactile Strips

Code: TSSST2935

Size: 290 x 35 x 5mm



93 Kenilworth Street Warwick Qld 4370  
1800 250 704 [www.swmdirect.com.au](http://www.swmdirect.com.au)